


AG325 – GLASS MOUNT ANTENNA

Multi-Band 1/4 Wave Spider Patch

Frequency: GSM850
 GSM900
 GSM1800
 GSM1900
 UMTS 2.1GHz (3G)
 WiFi / Zigbee 2.4GHz

Gain: 0-2dBi
 VSWR: Less than 2:1 in all bands
 Impedance: 50Ω

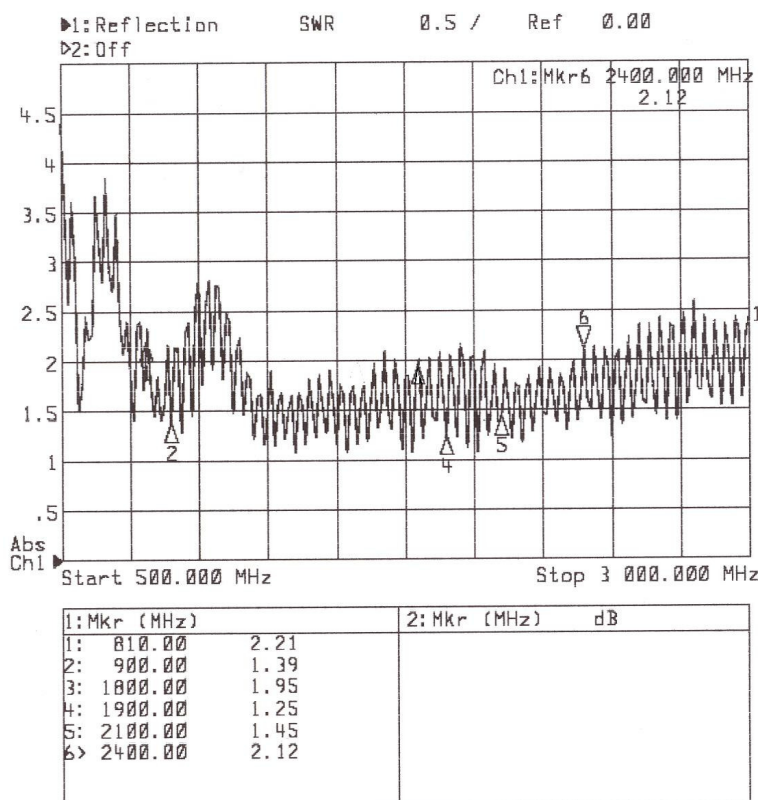

The above data is to be used as baseline information only. For a more detailed specification, application support or application approval samples, please contact our technical support help desk on +44 (0)1522 884750. We reserve the right to modify the specifications without prior notice.



Physical Data

Gross Dimensions:	79mm x 25mm x 7mm Black PVC (Type T12/TM2) plastic.
Mounting:	Double-sided adhesive pad, 0.8mm thick
Water Resistance:	Meets IP67
Operating Temp:	-40 °C to +85 °C
Cable Type:	RG174
Connectors:	SMA Plug

The above data is to be used as baseline information only. For a more detailed specification, application support or application approval samples, please contact our technical support help desk on +44 (0)1522 884750. We reserve the right to modify the specifications without prior notice.