

# IPGS-6416XSFP

16 10/100/1000T PoE at/af + 4 1G/2.5G/10G SFP+ L2+ Industrial Managed Ethernet Switch w/ Enhanced G.8032 Ring, PXE, 12V/48V

## input models

- Auto-sensing triple speed 1G/2.5G/10G SFP+ Uplink Cage
- Support IEEE802.3at/af up to 30W per port PoE management incl. Detection and Scheduling
- Support PXE to verify switch firmware with the latest or certain version on server
- Enhanced G.8032 ring protection < 20ms for single ring. Supports enhanced mode and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 8 MSTI /RSTP ; support MRP ring
- Miss-wiring avoidance & node failure protection
- User friendly UI, including auto topology drawing and DDM threshold monitoring with dB values\*\*\*; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, MLD snooping, DHCP server & DHCP Option82; Port based DHCP distribution, Mac based DHCP server, SSH/SSL, HTTPS, INGRESS/EGRESS\* ACL L2/L3, TACACS+, subnet VLAN and protocol VLAN
- Environmental Monitoring for temp., actual input voltage, current & total power load
- Wide range operation temperature (-E model):-40~75C/-40~167F; Fan-less design



## OVERVIEW

Lantech IPGS-6416XSFP-16 is a high performance L2+ (All Gigabit) Ethernet switch with 16 100/1000T + 4 1G/2.5G/10G auto sensing SFP+ w/16 PoE 802.3at/af ports which provides advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms in single ring while also supports enhanced mode with easy configuration, comprehensive QoS, advanced security including INGRESS/EGRESS ACL L2/L3, TACACS+, SSH/SSL, Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port which are important features required in large network. The Cisco Discovery Protocol (CDP) and LLDP are supported for Ciscoworks to detect the switch info and show on L2 map topology.

### Up to 16 PoE at/af ports w/advanced PoE management

Compliant with 802.3at/af standard, the Lantech IPGS-6416XSFP-16 is able to feed each PoE port up to 30 Watt. Lantech IPGS-6416XSFP-16 supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Each PoE ports can be Enabled/disabled, get the voltage, current, Watt, and

temperature info displayed on WebUI.

### Miss-wiring avoidance, Loop protection, node failure protection

The IPGS-6416XSFP-16 also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IPGS-6416XSFP-16 is able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

### Support PXE to verify switch firmware with the latest or certain version

The switch can check its firmware version during booting time via PXE protocol. If switch finds any newer version, it will upload automatically.

### Optional L3Lite to be upgradable

Lantech OS3 and OS4 are optional upgradable to L3 Lite for

future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter- VLAN routing.

#### **DHCP option 82 & Port based, Mac based DHCP, Option66, IPv6 DHCP server**

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. For the ending device, which need to download file from TFTP server, DHCP Option66 server can offer IP address of TFTP server to DHCP client. IPv6 address resolution for basic DHCP service can be supported.

#### **User friendly GUI, Auto topology drawing**

The user friendly UI, innovative auto topology drawing and topology demo makes IPGS-6416XSFP-16 much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line.

#### **Enhanced G.8032 ring, 8 MSTI MSTP, MRP ring**

Lantech IPGS-6416XSFP-16 features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering multicast packets. It also supports various ring topologies that covers enhanced ring and basic ring by easy setup than others. It supports MSTP that allows RSTP over VLAN for redundant links with 8 MSTI.

MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

#### **IGMPv3, GMRP, router port, MLD Snooping, static multicast forwarding and multicast Ring protection**

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, router port, MLD snooping and static multicast forwarding binding by ports for video surveillance application.

#### **Editable configuration file; USB port for upload/download configuration**

The configuration file of Lantech IPGS-6416XSFP-16 can be

exported and edited with word processor for the following switches to configure with ease.

The USB port can upload/download the configuration from/to USB dongle.

#### **2DI/2DO for relay contact and event alerting by email & traps**

In case of event, the IPGS-6416XSFP-16 is able to send an email to pre-defined addresses as well as SNMP Traps out immediately. It provides 2DI and 2DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

#### **Environmental monitoring for switch inside information**

The environmental monitoring can detect switch overall temperature, total PoE load, voltage and current where can send the SNMP traps, email when abnormal.

#### **Dual power 12V/48V input, high PoE budget**

The Lantech IPGS-6416XSFP-16 is designed with dual power supply at 48VDC(48V model) or 9.5V~56VDC input (12V model). The 48V model can have 240W PoE budget while 12V model can have 80W (12V input) or 120W (24V input) budget.

#### **Industrial hardened design with high EFT and ESD protection**


Lantech IPGS-6416XSFP-16 features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. Featured with relay contact alarm function, the IPGS-6416XSFP-16 is able to connect with alarm system in case of power failure or port disconnection. It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory applications. The -E model can be used in extreme environments with an operating temperature range of -40°C to 75°C.

## FEATURES & BENEFITS

- **16 100/1000T + 4 1G/2.5G/10G auto sensing SFP+ w/16 PoE 802.3af/at ports (Total 20 Ports Switch)**
- **Embedded 16 PoE IEEE802.3af/at function to feed power up to 30W for active mode operation**
- **48V input for PoE budget 240W; 12V input for PoE budget 80W/ 24V input for PoE budget 120W**
- **PoE management including PoE detection and scheduling for PD (power devices)**
- **Back-plane (Switching Fabric): 112Gbps**
- **16K MAC address table**
- **DDM to support SFP diagnostic function\*\*\***
  - Automatically convert the raw data into dB values for TX power/RX power, making it easier to measure the fiber distance
- **10KB Jumbo frame**
- **User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting**
- **Enhanced G.8032 Ring protection in 20ms for single ring**
  - Support various ring/chain topologies, including enhanced ring & basic ring
  - Enhanced G.8032 ring configuration with ease
  - Cover multicast and data packets protection
- **Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority**
- **IEEE 802.1d STP, IEEE 802.1w RSTP,802.1s MSTP VLAN redundancy with 8 MSTI**
- **4K 802.1Q VLAN, Port based VLAN, GVRP**
- **Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console**
- **Support PXE to verify switch firmware with the latest or certain version**
- **DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server; Port based DHCP server; DHCP Option 66**
- **Mac based DHCP server to assign IP address that includes dumb switches in DHCP network**

- **Bandwidth Control**
  - Ingress packet filter and egress rate limit
  - Broadcast/multicast packet filter control
- **Relay alarm output system events**
- **Miss-wiring avoidance**
  - LED indicator
- **Node failure protection**
  - Ensure the switches in a ring to survive after power breakout is back
  - The status can be shown in NMS when each switch is back
- **TFTP/HTTP firmware upgrade**
- **System Event Log, SMTP Email alert and SNMP Trap for alarm support; 32 RMON counters**
- **Security**
  - SSL/SSH/INGRESS/EGRESS ACL L2/L3
  - MAC address table: MAC address entries/Filter/static MAC-Port binding
  - Remote Admin: IP address security management to prevent unauthorized intruder.
  - TACACS+
  - Login Security: IEEE802.1X/RADIUS
  - HTTPS for secure access to the web interface
- **Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application**
- **IGMP router port for Multicast protection**
- **IGMPv1,v2,v3 with Query mode for multimedia; GMRP**
- **Dual image firmware support**
- **MLD Snooping for IPv6 Multicast stream**
- **Factory reset button to restore setting to factory default**
- **Watchdog design to auto reboot switch when CPU is found dead**
- **Environmental monitoring for system actual input voltage, current, ambient temperature and total power load**
- **Supports DIDO (Digital Input/Digital Output)**
- **Configuration backup and restoration**
  - Supports editable configuration file for system quick installation
  - USB port to upload/download firmware by USB dongle
- **Wide operation temperature (-E model): -40C~75C/-40F~167F; Fan-less design**
- **IP30 metal housing with DIN rail and Wall-mount\*\* design**

**DIMENSIONS (unit=mm)**

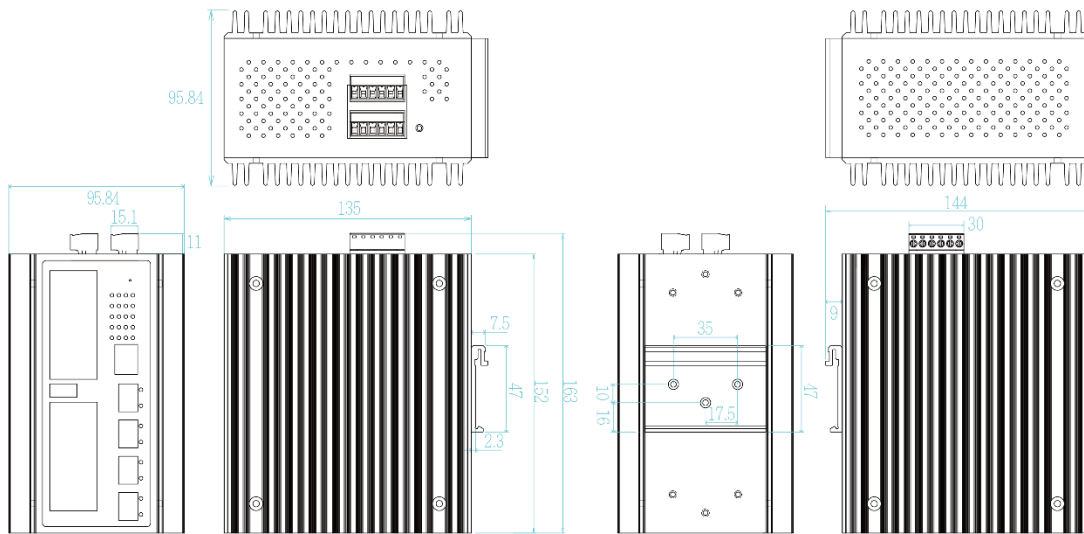

**SPECIFICATION**

**Hardware Specification**

Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP)
-----------	--

	IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet
Switch Architecture	Back-plane (Switching Fabric): 112Gbps
Mac Address	16K MAC address table
Jumbo frame	10KB
Connectors	10/100/1000T: 16 x ports RJ-45 with Auto MDI/MDI-X function Mini-GBIC: 4 x 1G/2.5G/10G SFP+ auto-sensing

	socket with DDMI RS-232 connector: RJ-45 type USB x 1 Power & Relay connector: 1 x 6-pole terminal block DIDO : 1 x 6-pole terminal block
Network Cable	10Base-T: 2-pair STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair STP Cat. 5/ 5E/ 6 cable; EIA/TIA-568 100-ohm (100m) 1000Base-T: 4-pair STP Cat5E/6 cable; 10GBase-T:4-pair STP Cat6/6A/7 cable
Optical Cable	<b>1Gbps:</b> Multi mode: 0 to 550 m, 850 nm (50/125 µm); 0 to 2 km, 1310 nm (50/125 µm) Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm (9/125 µm); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 nm (9/125 µm) <b>2.5Gbps</b> Multi mode: 0 to 300 m, 850 nm (50/125 µm); Single mode: 0 to 2 km/ 15 km/ 40 km, 1310 nm (9/125 µm); 0 to 40 km/ 80 km/ 100km, 1550 nm (9/125 µm) <b>WDM 1Gbps:</b> Single mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1310 nm (9/125 µm); 0 to 80 km, 1490 nm (9/125 µm); 0 to 10 km/ 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 µm) <b>WDM 2.5Gbps</b> Single mode: 0 to 5 km/ 20 km/ 40 km/ 60 km, 1310 /1550nm (9/125 µm); 0 to 80 km, 1490/1550 nm (9/125 µm) <b>10Gbps</b> Multi mode: 0 to 300 m, 850 nm (OM3 50/125 µm); Single mode: 0 to 10 km/ 20 km, 1310 nm (9/125 µm); 0 to 40 km/ 80km/ 100 km, 1550 nm (9/125 µm) <b>WDM 10Gbps</b> Single mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1270/1330 nm (9/125 µm); 0 to 80km, 1490/1550 nm (9/125 µm)
LED	Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) Ethernet port: Link/Activity (Green), Speed (Green); 10G (Amber) PoE : Link/Act (Green); Mini-GBIC: Link/Activity (Green)
DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA
Operating Humidity	5% – 95% (Non-condensing)
Operating Temperature	-20°C~60°C / -4°F~140°F (Standard model) -40°C~75°C / -40°F~167°F(E model)
Storage Temperature	-40°C~85°C / -40°F~185°F
Power Supply	44~56VDC(48V model); 9.5V~56VDC(12V model) (18~57VDC to use with 10G copper SFP)
PoE Budget	240W for 44~56V input(48V model) (54V input is recommended for PTZ or heater applications 80W at 12V input; 120W at 24V input(12V model)
PoE pin assignment	RJ-45 port # 1~#16 support IEEE 802.3at/af End-point, Alternative A mode. Positive (VCC+): RJ-45 pin 1,2 Negative (VCC-): RJ-45 pin 3,6
Power Consumption	Max. 27W (full load w/o PoE)
Case Dimension	Metal case. IP-30, 95.84 (W) x 135 (D) x 152 (H) mm
Weight	900 g
Installation	DIN Rail and Wall Mount** Design
EMI & EMS	FCC Class A, CE EN55032 Class A, CE EN55024, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5, CE EN61000-4-6, CE EN61000-4-8, CE EN61000-6-2

Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
Railway compliance	EN50155:2017, EN50121-3-2:2015, EN50121-4:2015, EN61373:2010
MTBF	586,082.5 Hrs (IEC 62830 standards)
Warranty	5 years
<b>Software Specification</b>	
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI
SNMP MIB	RFC 1213 MIBII RFC 1158 MIB RFC 1157 SNMP MIB RFC 1493 Bridge MIB* RFC 1573 IF MIB RFC 2674 Q-Bridge MIB* RFC 2819 RMON MIB Private MIB
ITU G.8032	Support ITU G.8032 for Ring protection in less than 20ms for self-heal recovery (single ring enhanced mode)  Support basic single ring & enhanced ring Enhanced G.8032 ring configuration with ease Cover multicast & data packets protection
PoE Management	PoE Detection to check if PD hangs then restart the PD PoE scheduling
Per Port PoE Status	On/ Off, voltage, current, watts, temperature
User friendly UI	<ul style="list-style-type: none"> <li>■ Auto topology drawing</li> <li>■ Topology demo</li> <li>■ Complete CLI for professional setting</li> </ul>
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN
CDP	Cisco Discovery Protocol for topology mapping
Environmental Monitoring	System status for actual input voltage, current, total power load and ambient temperature to be shown in GUI and sent alerting if any abnormal status
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.) GVRP Protocol based VLAN, Subnet based VLAN
IPv6/4	Present
Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree 8 MSTI
Quality of Service	The quality of service determined by port, Tag and IPV4 Type of service, IPV4 Differentiated Services Code Points - DSCP
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues
Remote Admin	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.
Login Security	Supports IEEE802.1X Authentication/RADIUS
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"
Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/static MAC-Port binding Ingress/Egress ACL L2/L3 SSL/ SSH for Management HTTPS for secure access to the web interface TACACS+ for Authentication
IGMP	Support IGMP snooping v1,v2,v3; 256 multicast groups; IGMP router port ; IGMP query; GMRP
MLD Snooping	Support IPv6 Multicast stream
Static multicast forwarding	Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
Bandwidth	Support ingress packet filter and egress packet limit.

Control	The egress rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.
Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
System Log	Supports System log record and remote system log server
SMTP Trap	Supports SMTP Server and 8 e-mail accounts for receiving event alert; can send SMS** text alert via mobile
Relay Alarm	Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V
Protection	<ul style="list-style-type: none"> <li>■ Miss-wiring avoidance</li> <li>■ Node failure protection</li> <li>■ Loop protection</li> </ul>
SNMP Trap	Up to 5 trap stations; trap types including: <ul style="list-style-type: none"> <li>● Device cold start</li> <li>● Authorization failure</li> <li>● Port link up/link down</li> <li>● DI/DO open/close</li> <li>● Typology change(ITU ring)</li> <li>● Power failure</li> <li>● Environmental abnormal</li> </ul>
PXE	PXE to verify switch firmware with the latest or

	certain version
DHCP	Provide DHCP Client/ DHCP Server/DHCP Option 82 (Client & Server)/Port based DHCP; DHCP Option 66; IPv6 address resolution for DHCP server**
Mac based DHCP Server	Assign IP address by Mac that can include dumb switch in DHCP network
L3Lite	Lantech OS3 and OS4 are optional upgradable to L3 Lite for future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter- VLAN routing
DNS	Provide DNS client feature and support Primary and Secondary DNS server.
SNTP	Supports SNTP to synchronize system clock in Internet
Firmware Update	Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade
Configuration upload and download	Supports text configuration file for system quick installation; Support factory reset button to restore all settings back to factory default; USB for auto restore/backup
Diagnostic	Support Ping, ARP table and DDM information
Dual Image Firmware	Support dual image firmware function

\*Future release  
\*\*Optional  
\*\*\*Optional DDM SFP required

## ORDERING INFORMATION

- **IPGS-6416XSFP-16-48V.....P/N: 8350-864**  
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G/10G SFP+ L2+ Industrial PoE Managed Ethernet Switch; -20°C to 60°C; Environmental Monitoring; dual 44V~56V input PoE budget 240W
- **IPGS-6416XSFP-16-48V-E.....P/N: 8350-865**  
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G/10G SFP+ L2+ Industrial PoE Managed Ethernet Switch; -40°C to 75°C; Environmental Monitoring; dual 44V~56V input PoE budget 240W
- **IPGS-6416XSFP-16-12V.....P/N: 8350-866**  
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G/10G SFP+ L2+ Industrial PoE Managed Ethernet Switch; -20°C to 60°C; Environmental Monitoring; dual 9.5V~56V input, PoE budget 80W at 12V, 120W at 24V
- **IPGS-6416XSFP-16-12V-E.....P/N: 8350-867**  
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G/10G SFP+ L2+ Industrial PoE Managed Ethernet Switch; -40°C to 75°C; Environmental Monitoring; dual 9.5V~56V input, PoE budget 80W at 12V, 120W at 24V

## OPTIONAL ACCESSORIES

### Software package

- **OS3 – L3L..... P/N: 9000-114**  
OS3 software platform with Layer 3 Lite functions (please check Lantech software data sheet for details)
- **OS3 – IEC61375-2-5 ..... P/N: 9000-115**  
OS3 software platform with IEC-61375-2-5 ETBN (Ethernet Train Backbone Networks) function (please check Lantech software data sheet for details)
- **OS3 – L3..... P/N: 9000-116**  
OS3 software platform with Layer 3 functions (please check Lantech software data sheet for details)

### DIN Rail Power for 802.3at Applications

- **NDR-240 series** 240W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

### Mini GBIC (SFP)

- |  |  |
|--|--|
| ■ <b>8330-162X</b> MINI GBIC 1000SX (LC/0.5km) Transceiver | ■ <b>8330-168</b> MINI GBIC 1000T (100m) Transceiver       |
| ■ <b>8330-163X</b> MINI GBIC 1000SX2 (LC/2km) Transceiver  | ■ <b>8330-188</b> LTSFP-1000BX-10KM Transceiver (WDM 1310) |
| ■ <b>8330-165X</b> MINI GBIC 1000LX (LC/10km) Transceiver  | ■ <b>8330-189</b> LTSFP-1000BX-10KM Transceiver (WDM 1550) |
| ■ <b>8340-0591</b> MINI GBIC 1000LHX (LC/40km) Transceiver | ■ <b>8330-186</b> LTSFP-1000BX-20KM Transceiver (WDM 1310) |
| ■ <b>8330-166</b> MINI GBIC 1000XD (LC/50km) Transceiver   | ■ <b>8330-187</b> LTSFP-1000BX-20KM Transceiver (WDM 1550) |
| ■ <b>8330-169</b> MINI GBIC 1000XD (LC/60km) Transceiver   | ■ <b>8330-180</b> LTSFP-1000BX-40KM Transceiver (WDM 1310) |
| ■ <b>8330-167</b> MINI GBIC 1000ZX (LC/80km) Transceiver   | ■ <b>8330-182</b> LTSFP-1000BX-40KM Transceiver (WDM 1550) |
| ■ <b>8330-170</b> MINI GBIC 1000EZx (120km) Transceiver    | ■ <b>8330-181</b> LTSFP-1000BX-60KM Transceiver (WDM 1310) |

- |                    |   |                    |  |
|--------------------|---|--------------------|--|
| ■ <b>8330-183</b>  | LTSFP-1000BX-60KM Transceiver (WDM 1550)            | (WDM 1270)         |  |
| ■ <b>8330-184</b>  | LTSFP-1000BX-80KM Transceiver (WDM 1490)            | ■ <b>8330-201D</b> | 10G Base SFP* , Single-mode(20km) Transceiver  |
| ■ <b>8330-185</b>  | LTSFP-1000BX-80KM Transceiver (WDM 1550)            | (WDM 1330)         |  |
| ■ <b>8330-262D</b> | MINI GBIC 2.5G 850nm VCSEL (LC/0.3km) Transceiver   | ■ <b>8330-202D</b> | 10G Base SFP* , Single-mode(40km) Transceiver  |
| ■ <b>8330-263D</b> | MINI GBIC 2.5G 1310nm FP (LC/2km) Transceiver       | (WDM 1270)         |  |
| ■ <b>8330-265D</b> | MINI GBIC 2.5G 1310nm DFB (LC/15km) Transceiver     | ■ <b>8330-203D</b> | 10G Base SFP* , Single-mode(40km) Transceiver  |
| ■ <b>8330-193D</b> | 10G Base SFP* SR, Multi-mode (LC/300m) Transceiver  | (WDM 1330)         |  |
| ■ <b>8330-194D</b> | 10G Base SFP* LR, Single-mode (LC/10km) Transceiver | ■ <b>8330-206</b>  | 10G/5G/2.5G/1000Base-T SFP, 3.3V,30m (10G) 50m (2.5G/5G) 100m (1G); -10~70°C (only used from 18V~57VDC power input, maximum two ports) |
| ■ <b>8330-200D</b> | 10G Base SFP* , Single-mode(20km) Transceiver       |                    |  |

All SFP ended with D are with Diagnostic function

**Lantech Communications Global Inc.**

[www.lantechcom.tw](http://www.lantechcom.tw)  
[info@lantechcom.tw](mailto:info@lantechcom.tw)

© 2019 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
Lantech may make changes to specification and product descriptions at anytime, without notice.